The Aqua illi is the world's smartest touch tap. Innovative design, cutting-edge technology, and premium aesthetics.

FEATURES

- Patented boiler design gives high volumes of boiling water
- Perfect water flow with zero splash
- Removable dispense nozzle for improved hygiene
- Designed to fill water bottles without the need for font extension
- Plumbed-to-waste flush-fitting drip tray
- · Safe dispense with a touch padlock feature
- Installed in modular form to fit into the tightest of spaces
- Pre-set fill volumes for any vessel and free flow options available
- Equality Act compliant controls available
- Touch or touchless modules available

MINIMUM WATER PRESSURE

• 2.5 BAR

MINIMUM WATER FLOW RATE

300 L.P.H.

POWER

 No. 3 x 220 - 240V ac 50Hz Single switched 13A power sockets

AQUA ALTO CHILLED STILL & HOT

Water System Power Load: (Peak Time):
8.0Amps – 1750 Watts

WASTE

No. 1 x 40mm upstand trapped waste supply

CAPACITY

BOILING PER HOUR

High: up to 45 litres or 180 cups

Ultra High: up to 90 litres or 180 flask/tea pots



CHILLED/SPARKLING/AMBIENT PER HOUR

High: up to 45 litres or 180 glasses Ultra High: 60+ litres or 240+ glasses

VENTILATION

The base cabinet that houses the water cooler requires adequate ventilation, the ambient air temperature inside the base cabinet should not exceed 32 C. No objects should be placed on or around the water cooler. Base cabinet ventilation options are available on request.

CO2 GAS

(For Sparkling Systems Only) Food grade CO2 bottle type E290 is to be provided by the operator (2 kg, 6 kg or 10kg). The CO2 bottle must be located as far as possible from any heat sources. The CO2 gas bottle should be sited in an upright position and secured with a safety strap.


E&OE REF: EWE-ALAI-V1




DIMENSIONS

Under-counter units and dispensers.

B - boiling, **C** - chilled, **S** - sparkling, **A** - ambient

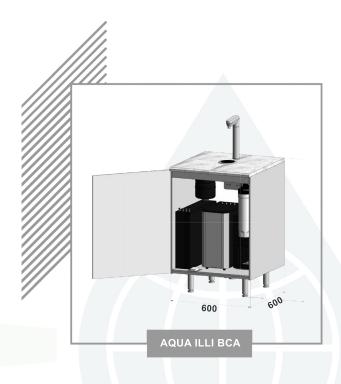










AQUAILLI-BCS

(233 dispense height)

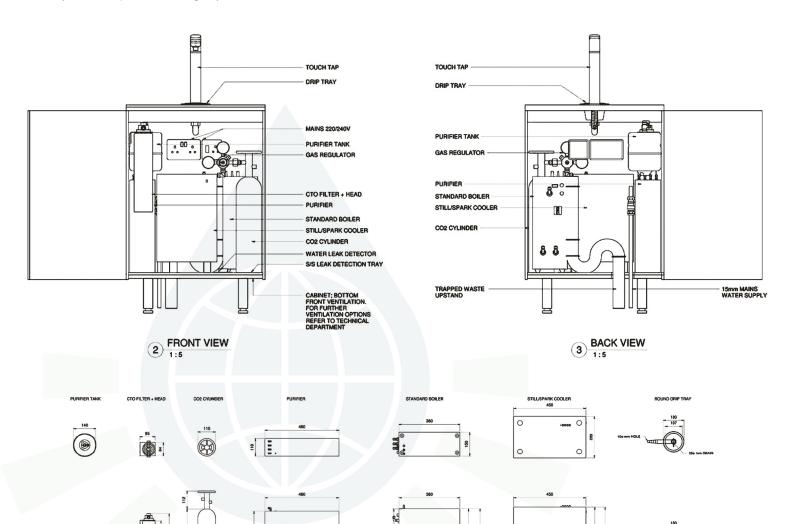

TOUCH TAP

